





EASYGO PREMIUM

EasyGo Premium is a compact and reliable auxiliary motor, which can be mounted on a wide range of wagons*, where employees transport goods over long distances. The motor easily manages the heavy moves, reduce the risk of physical disabilities and work injuries for the employees.

* Storage carts, platform trolleys etc., see further mounting specifications on the back or contact IMMO A/S.

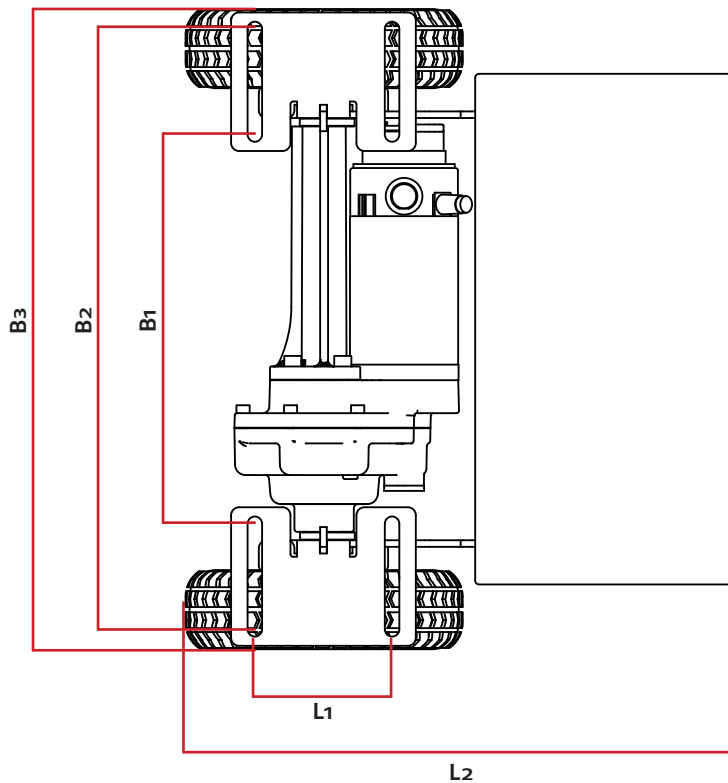

- 1) Speed
- 2) Battery indicator
- 3) Key
- 4) Reverse
- 5) Emergency stop
- 6) Charger
- 7) Drive

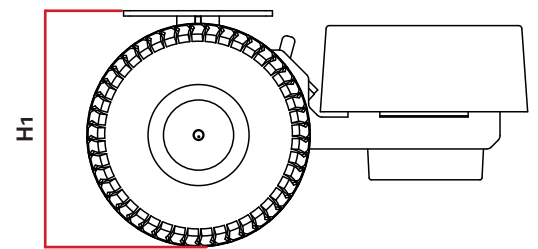

Dimensions	B1	B2	B3	L1	L2	H1
EasyGo Premium Small	285 mm	445 mm	485 mm	104 mm	428 mm	225 mm
EasyGo Premium Medium	375 mm	535 mm	575 mm	104 mm	380 mm	225 mm
EasyGo Premium Large	475 mm	635 mm	675 mm	104 mm	380 mm	230 mm
EasyGo Premium X-Large	575 mm	735 mm	775 mm	104 mm	380 mm	230 mm
EasyGo Premium Terrain	395 mm	555 mm	595 mm	104 mm	380 mm	315 mm

EasyGo Premium contributes to a physically healthy work environment, as the motor relieves the employees. A good work environment further contributes to improved well-being and to optimization of daily workflows.

EasyGo Premium is a powerful electric motor produced in three sizes: Small, Medium and X-large. The different sizes make it possible to mount EasyGo Premium on wagons, which has an installation width of 29.5-77.5 cm. The specific mounting dimensions for each size are shown in the illustration and scheme above.

EasyGo Premium is delivered as a complete solution ready for installation. The installation can easily be done yourself, but our authorized team of installers at IMMO A/S, can also take care of the installation for you.

The motor unit is going to replace the wheels in front of the wagon. The motor unit is connected to a speeder box, wherefrom the user can maneuver EasyGo Premium. The speeder box must be placed at the handle, in an ergonomic optimal position for the user. All interactions are kept intuitive and located in the speeder box to ensure, that the user always have easy access to all the functions and information needed.

EasyGo Premium Small 100350 / Medium 100955 / Large 101457 / X-Large 101442 / Terrain 101456			
Total load capacity distributed across the trolley kg	400 / 500 / 500 / 500 / 600	Driving distance per charge	Up to 10 km
Load capacity for the motor kg	200 / 250 / 250 / 250 / 300	Increase capacity	Up to 10°
Batteries	20 Ah	Engine power W	250 / 350 / 350 / 350 / 350
Charger - charging time	2.5 A - 6 hours	Weight incl. batteries kg	22 / 32 / 32 / 35 / 34

IMMO A/S
 Friis Hansens Vej 9 - DK-7100 Vejle
 +45 7585 8022
 hello@immodenmark.dk
 immodenmark.dk








EASYGO DUO

EasyGo Duo is a reliable auxiliary engine for mounting under trolleys with two swivel and two directional wheels. The auxiliary engine easily handles the heavy lifting, thereby reducing the risk of physical deterioration and work injuries for the employee.

EasyGo Duo has an electric lifting/lowering function when mounted. This allows the trolley to be manoeuvred using EasyGo Duo or as part of a coupled combination.

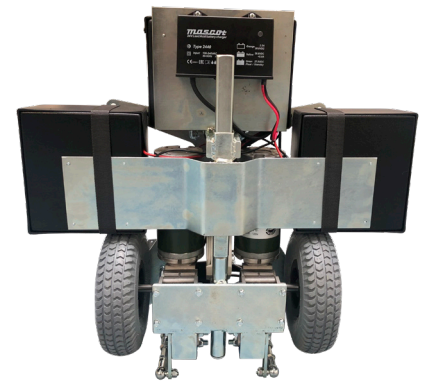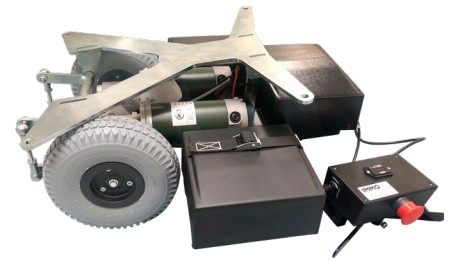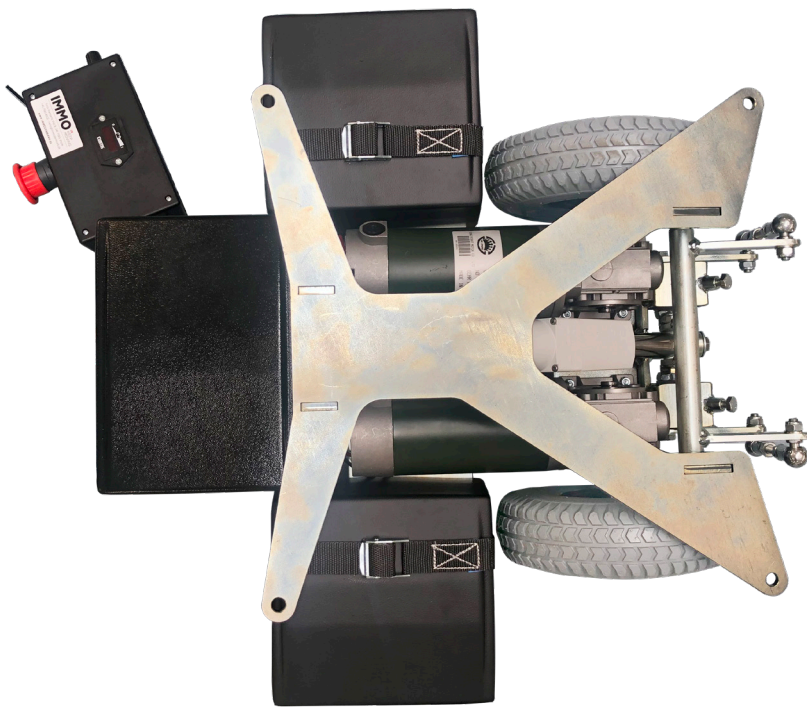

EasyGo Duo eases the burden for the employee during the transport of heavily loaded trolleys, thereby reducing the risk of physical deterioration and work injuries.

EasyGo Duo is an electric auxiliary engine for mounting on trolleys with two swivel and two directional wheels. The power unit, including its own sprockets, is mounted between the trolley's directional wheelset. EasyGo Duo is mounted using four bolts and requires a ground clearance on the trolley of at least 25 cm.

The engine solution is connected to the accelerator box, which is mounted on the trolley's handlebar. The engine is turned on and off


on the accelerator box, where you can also adjust the speed and direction of travel. The speed is adjusted steplessly via the accelerator arm, which makes it possible to adapt the driving speed to the conditions and one's own walking speed. It is possible to raise or lower the power unit using the push button on the accelerator box.

EasyGo Duo can be used to transport trolleys in hotels, hospitals and on industrial premises. When transporting trolleys over long distances, it is possible to fit a trailer. This saves time, increases efficiency and improves the working environment. The trailer can be folded up when not in use.

EasyGo Duo # 102126			
Dimensions	H: 250 mm, W: 600 mm, L: 590 mm	Engine power	2 x 180W
Weight	40 kg	Driving distance per charge	Up to 15 km
Batteries	20 Ah	Speed	Up to 6 km/h
Charger - charging time	24V, 2,5A - 8 hours	Increase capacity	Up to 10°

IMMO A/S
 Friis Hansens Vej 9 - DK-7100 Vejle
 +45 7585 8022
 hello@immodenmark.dk
 immodenmark.dk






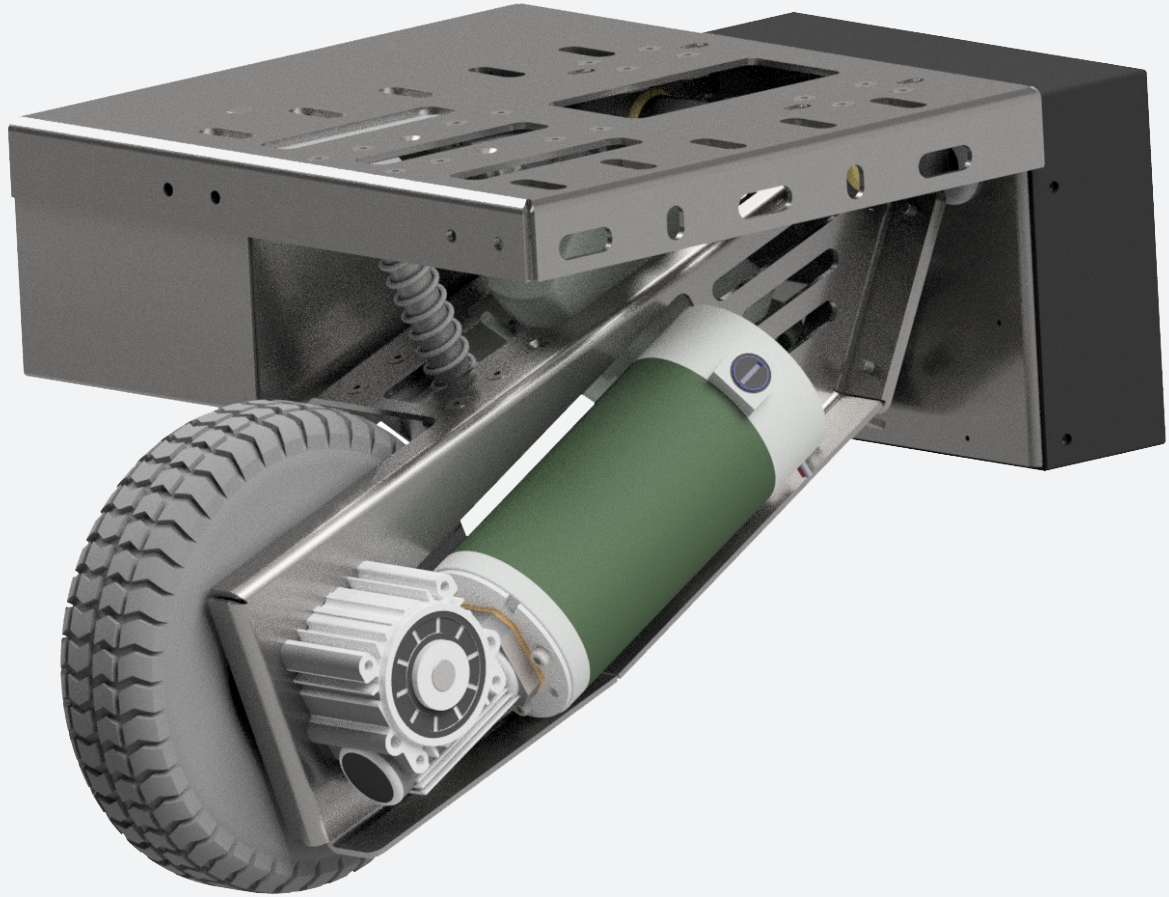

EASYGO ONE

EasyGo One is a reliable auxiliary engine for mounting under manual standard trolleys. The auxiliary engine easily and effectively handles movement of the trolley, thereby reducing the risk of physical deterioration and work injuries for the employee.

EasyGo One has an electric lifting/lowering function of the power unit. This allows the trolley to be manoeuvred using EasyGo One manually or as part of a coupled combination.

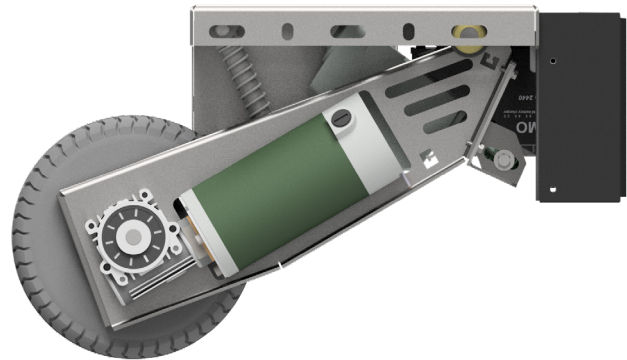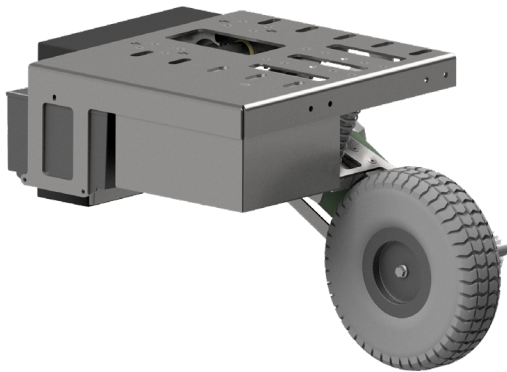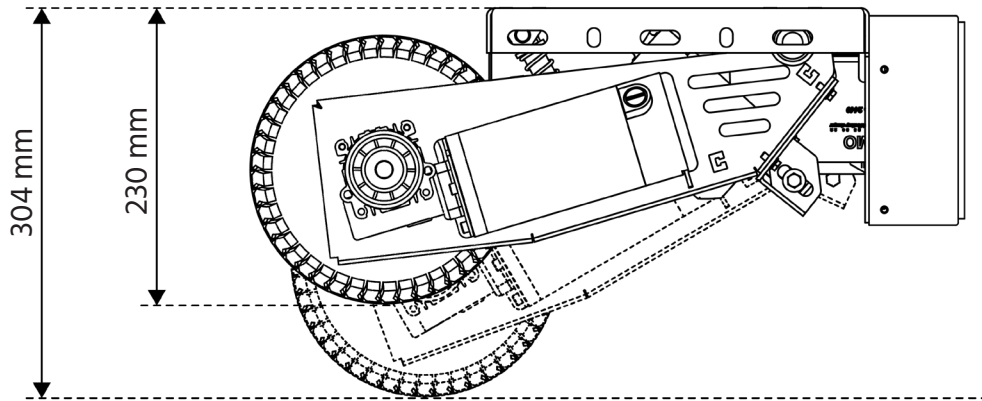

EasyGo One eases the burden for the employee during the transport of trolleys, thereby reducing the risk of physical deterioration and work injuries.

EasyGo One is an efficient electric auxiliary engine with one wheel. The power unit does not replace the trolley's original wheel but is mounted between the trolley's directional wheelset. EasyGo One is mounted on the trolley frame using four bolts and requires a ground clearance on the trolley of at least 25 cm.

In order to ensure a high level of flexibility of applications, an actuator is integrated into EasyGo One's power unit. The actuator makes


it possible to raise or lower the sprocket so that it makes contact with the ground or is lifted free. If the sprocket is in contact with the ground, the trolley can be transported using EasyGo One. If on the other hand the sprocket has been lifted free of the ground, the trolley can be manoeuvred manually or as part of a coupled combination.

EasyGo One is controlled via the accelerator box, which is mounted on the trolley's handlebar and connected to the power unit. All functions relevant to driving are situated on the accelerator box. The speed is adjusted steplessly via the accelerator arm within the chosen speed selection. This makes it simple to adapt the speed to one's own walking speed and the specific conditions.

EasyGo One # 102241			
Dimensions	H: 230 mm, W: 335 mm, L: 560 mm	Engine power	180 W
Batteries	9 Ah	Driving distance per charge	Up to 5 km
Charger - charging time	2,5A - 4 hours	Speed	Up to 4.5 km/h


IMMO A/S
 Friis Hansens Vej 9 - DK-7100 Vejle
 +45 7585 8022
 hello@immodenmark.dk
 immodenmark.dk



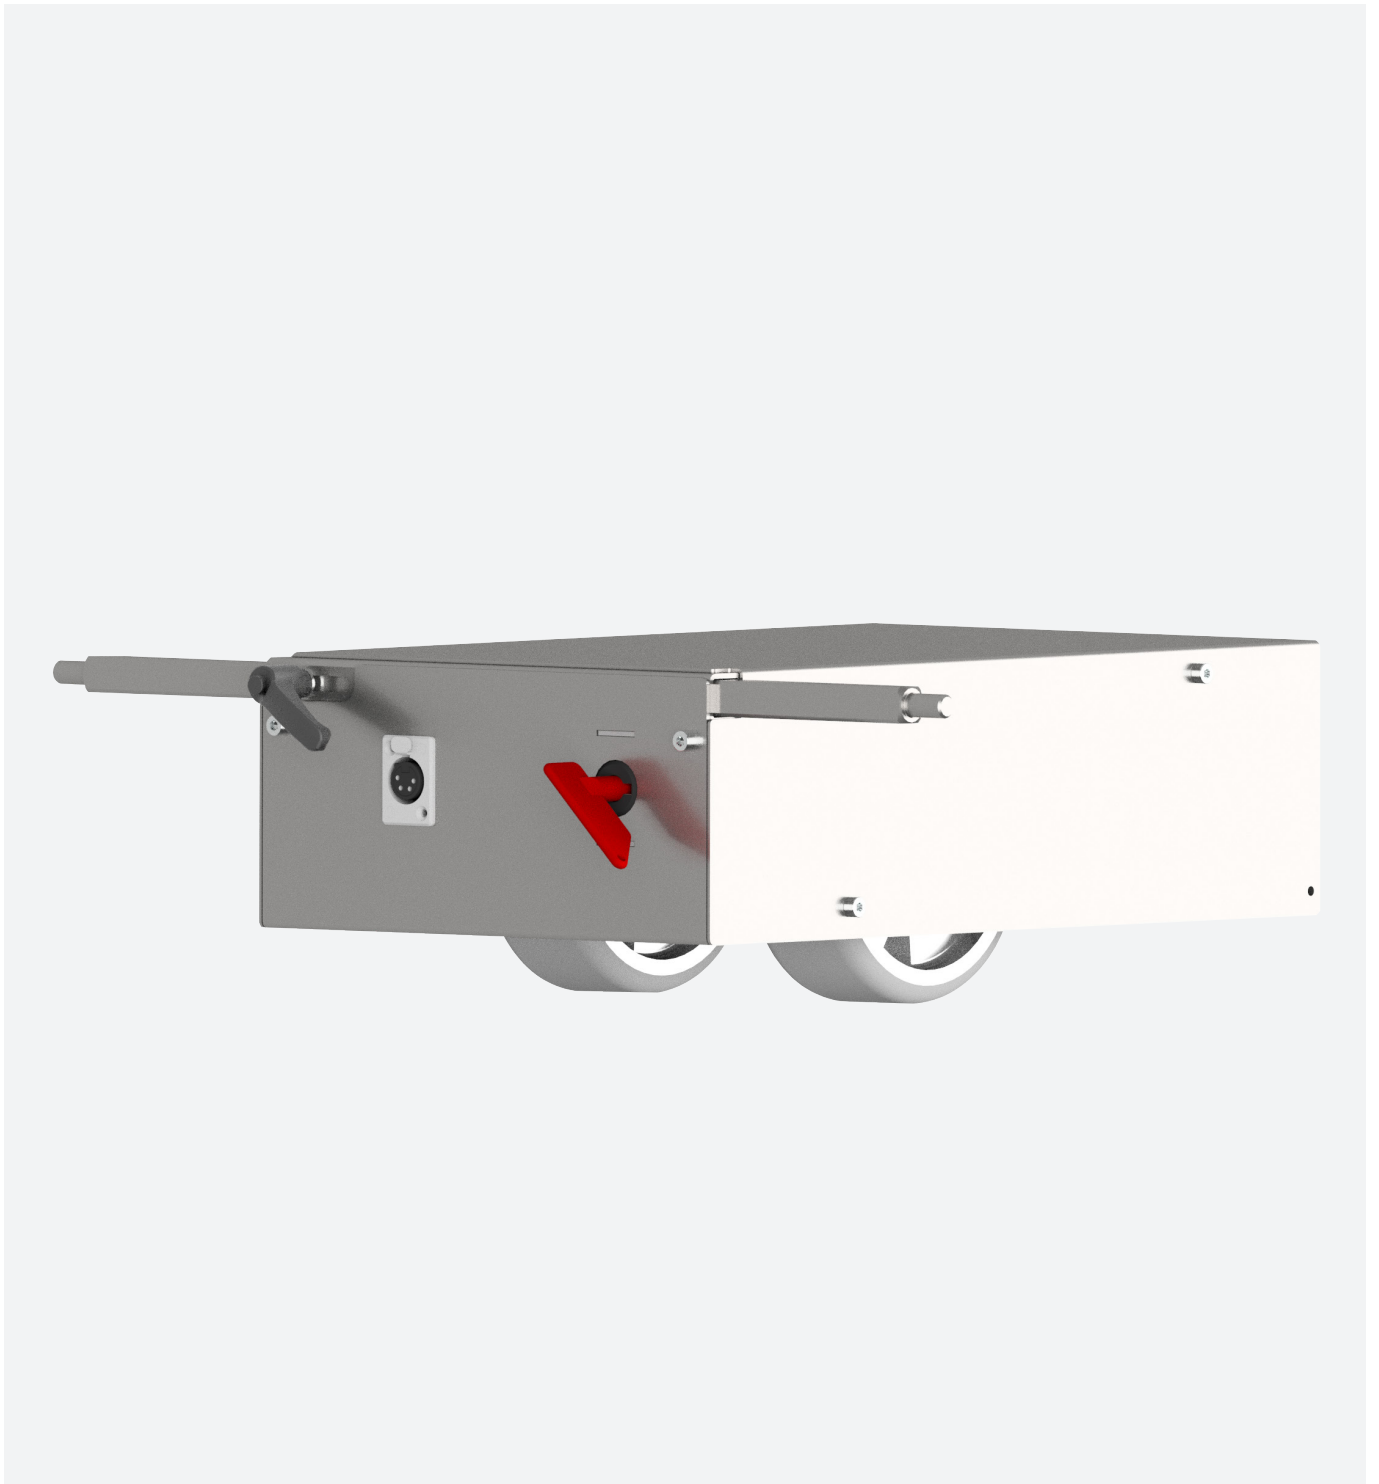

EASYGO MINI

EasyGo Mini is a reliable auxiliary engine for mounting under smaller manual trolleys. The auxiliary engine easily and effectively handles the moving of the cart, easing the burden for the employee.

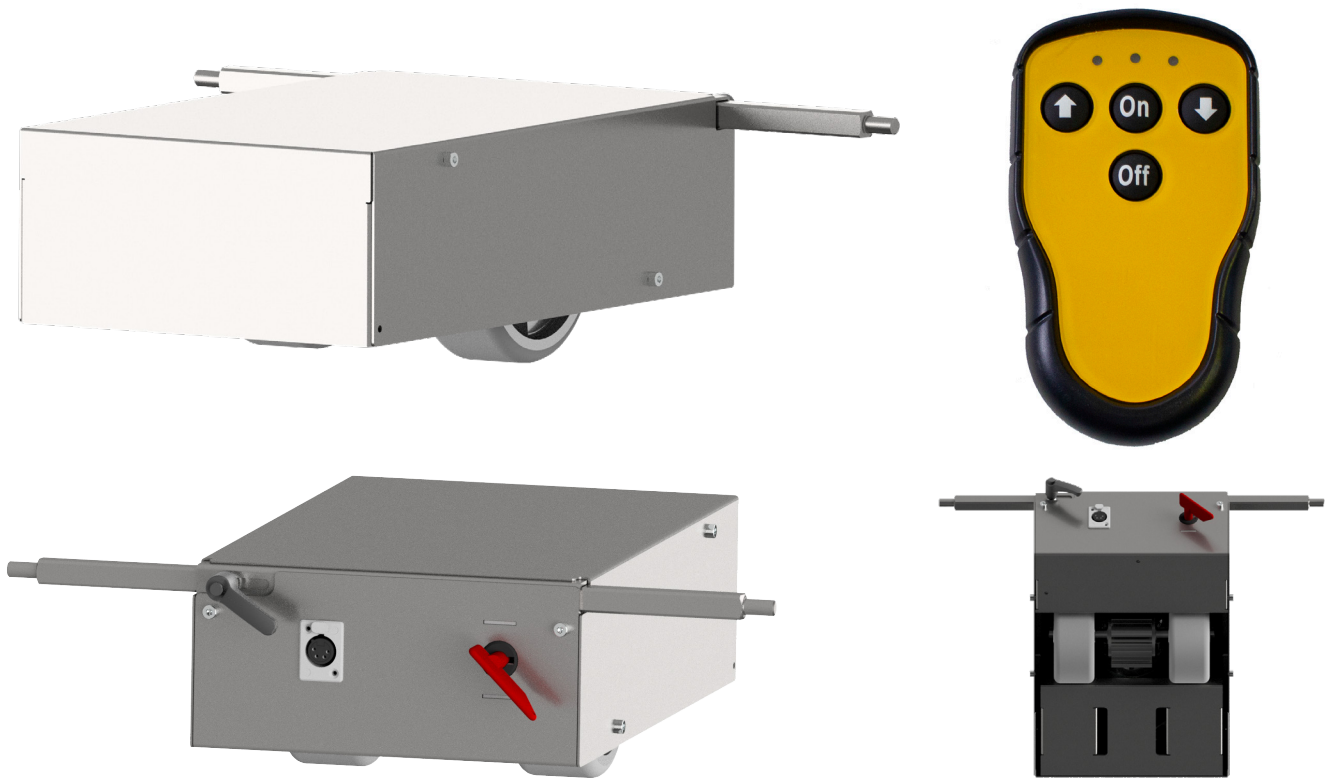

EasyGo Mini is a compact auxiliary engine for smaller trolleys, such as canteen and cleaning trolleys.

EasyGo Mini is an electric auxiliary engine that is controlled using the wireless remote control supplied. The power unit does not replace the trolley's original wheels, but is mounted centrally under the trolley. Installation is done by mounting one bracket on either side of the trolley's frame, wherein the power unit's ejector rods are pushed out and fixed in place.

EasyGo Mini is controlled via the wireless remote control. The remote control is coded to the specific power unit it is supplied with, which makes it possible to run several trolleys with one EasyGo Mini installed

without experiencing disruptions. All the driving-relevant functions are gathered together on the remote control to make manoeuvring as simple as possible.

The charging connector and the circuit breaker are located in the power unit. The charging connector makes it easy to charge EasyGo Mini's battery pack. The circuit breaker ensures that the user can turn off the engine and remove the key to safeguard against unauthorised use.

EasyGo Mini is supplied as a complete solution ready for mounting. It's easy to mount the power solution yourself, but you're welcome to ask one of our authorised fitters at IMMO A/S to take care of the mounting for you.

EasyGo Mini # 102567			
Dimensions	H: 143 mm, W: 453-475 mm, L: 425 mm	Engine power	150 W
Batteries	9 Ah	Driving distance per charge	Up to 8 km
Charger - charging time	2.5 A - 4 hours	Speed	Up to 5 km/h

IMMO A/S
 Friis Hansens Vej 9 - DK-7100 Vejle
 +45 7585 8022
 hello@immodenmark.dk
 immodenmark.dk

